



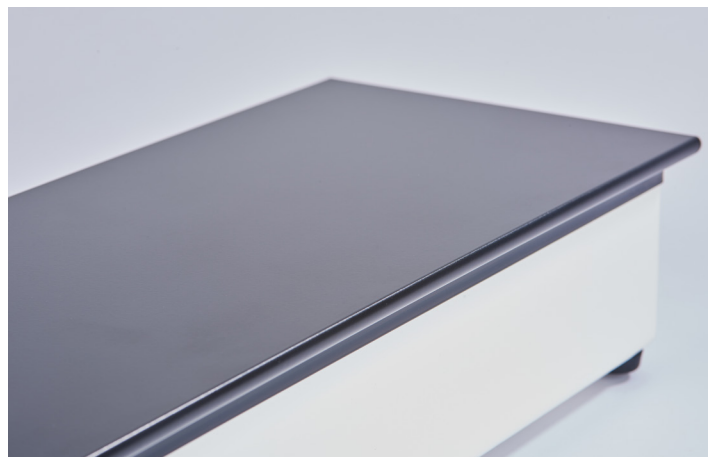
The **OTS 40** is a stable and robust slide stretching table that is available in five different sizes and finds its place in every laboratory.

The work surface consists of a plastic-coated aluminum plate that is 6 mm thick. This enables rapid heating to the desired working temperature, which is then kept stable during the entire duration of use. Temperatures of max. +99 °C can be set using a digital temperature controller at the front. The current temperature is shown on the display during operation.

The **OTS 40** series has proven itself particularly thanks to its high temperature constancy and long life time in routine laboratory work.



| Technische Daten OTS 40.1520 |                             | Art.-Nr. 01-4001-00 |
|------------------------------|-----------------------------|---------------------|
| Temperatur:                  | +30 °C bis +99 °C           |                     |
| Maße gesamt (B/T/H):         | 150 x 200 x 80 mm           |                     |
| Gewicht:                     | 1,7 kg                      |                     |
| Anschlusswerte:              | 230 V / 50 – 60 Hz / 120 VA |                     |
| Technische Daten OTS 40.1540 |                             | Art.-Nr. 01-4002-00 |
| Temperatur:                  | +30 °C bis +99 °C           |                     |
| Maße gesamt (B/T/H):         | 150 x 400 x 80 mm           |                     |
| Gewicht:                     | 2,9 kg                      |                     |
| Anschlusswerte:              | 230 V / 50 – 60 Hz / 300 VA |                     |
| Technische Daten OTS 40.2025 |                             | Art.-Nr. 01-4003-00 |
| Temperatur:                  | +30 °C bis +99 °C           |                     |
| Maße gesamt (B/T/H):         | 200 x 250 x 80 mm           |                     |
| Gewicht:                     | 2,4 kg                      |                     |
| Anschlusswerte:              | 230 V / 50 – 60 Hz / 250 VA |                     |
| Technische Daten OTS 40.2530 |                             | Art.-Nr. 01-4004-00 |
| Temperatur:                  | +30 °C bis +99 °C           |                     |
| Maße gesamt (B/T/H):         | 250 x 300 x 80 mm           |                     |
| Gewicht:                     | 3,6 kg                      |                     |
| Anschlusswerte:              | 230 V / 50 – 60 Hz / 350 VA |                     |
| Technische Daten OTS 40.3040 |                             | Art.-Nr. 01-4005-00 |
| Temperatur:                  | +30 °C bis +99 °C           |                     |
| Maße gesamt (B/T/H):         | 300 x 400 x 80 mm           |                     |
| Gewicht:                     | 5,4 kg                      |                     |
| Anschlusswerte:              | 230 V / 50 – 60 Hz / 550 VA |                     |

**MEDITE** **MEDITE Medical GmbH**

Wollenweberstr. 12 • 31303 Burgdorf • Germany

Phone +49 5136 88 84-0 • Fax +49 5136 88 84-55

info@medite.de • www.medite.de

Subject to change without prior notice. Pictures and colours may vary.